



Parallel blades



Opposed blades

# Multileaf dampers

## JZ



### For shutting off the airflow in air conditioning systems

Rectangular multileaf dampers for volume flow and pressure control as well as for shutting off ducts and openings in walls and ceiling slabs

- Maximum dimensions 2000 × 1995 mm
- Casing air leakage to EN 1751, class C
- Aerofoil parallel or opposed action blades
- Blades interconnected by external linkage (for parallel or opposed blade action)
- Available in standard sizes and many intermediate sizes
- Can be combined with external weather louvres

Optional equipment and accessories

- Actuators: Open/close actuators, modulating actuators
- Explosion-proof construction with pneumatic actuator or spring return actuator
- Powder-coated construction

General information	2	Dimensions	15
Function	3	Materials and surfaces	20
Technical data	5	Attachments	20
Quick sizing	8	Product details	25
Specification text	9	Installation details	28
Order code	10	Explanation	30
Variants	11		

## General information

### Application

- Multileaf dampers as a control element in the volume flow rate and differential pressure control in ventilation and air conditioning systems
- For shutting off ducts and openings in walls and ceiling slabs
- Parallel action blades are preferably used for opening/closing
- Due to their characteristics, opposed action blades are preferable for variable operation
- Steel and stainless steel variants with brass or stainless steel bearings are suitable for use in potentially explosive atmospheres (ATEX)

### Special characteristics

- Aerofoil blades
- Low-maintenance, robust construction
- No parts with silicone
- Available in standard sizes and many intermediate sizes

### Nominal sizes

- B: 200 – 2000 mm, in increments of 1 mm
- Width subdivided (BM): 2001 – 4150 mm, in increments of 1 mm
- H: 180, 345, 510, 675, 840, 1005, 1170, 1335, 1500, 1665, 1830, 1995 mm (intermediate sizes 183 – 1995 in increments of 1 mm, except for standard size H - 1 mm, H + 1 mm, H + 2 mm)
- Height subdivided (HM): 1999 – 4066 mm, in increments of 1 mm
- Any combination of B × H

### Variants

- JZ-S: Multileaf damper with opposed blade action, made of galvanised sheet steel
- JZ-P: Multileaf damper with parallel blade action, made of galvanised sheet steel
- JZ-S-A2: Multileaf damper with opposed blade action, made of stainless steel
- JZ-P-A2: Multileaf damper with parallel blade action, made of stainless steel

### Construction

#### Duct connection

- Corner holes on both sides
- G: Flange holes on both sides

#### Bearings

- Plastic bearings, operating temperature -20 – 100 °C
- M: Brass bearings, operating temperature -20 – 150 °C
- E: Stainless steel bearings, operating temperature -20 – 150 °C

#### Blades

Only for steel or stainless steel multileaf dampers with brass or stainless steel bearings (JZ-...-M, JZ-...-E)

- V: Reinforced blades available from width 800 mm

### Parts and characteristics

- Ready-to-install shut-off damper
- Blades with external linkage
- Drive arm

### Attachments

- Quadrant stays and limit switches for the infinite adjustment of the multileaf dampers and for capturing the end positions
- Open/close actuators for opening and closing multileaf dampers
- Modulating actuators for variable damper blade positions
- Pneumatic actuators for opening and closing multileaf dampers
- Explosion-proof actuators for opening and closing multileaf dampers

### Accessories

- Installation subframes for the fast and simple installation of multileaf dampers

### Construction features

- Rectangular casing, welded (P1: casing with screws), material thickness galvanised steel 1.25 mm, stainless steel A2 = 1.2 mm
- Blades, material thickness 1 mm
- Flanges on both sides, suitable for duct connections, either corner holes or flange holes
- External linkage, robust and durable, consisting of the coupling rod and horizontal arms
- Damper blade shafts, Ø12 mm, with notch to indicate the damper blade position (not for ZS99)
- With spindle as an attachment: For the position of the spindle, see "Dimensions and weights"
- With actuator as an attachment: The actuator is always attached to the second blade from the top
- Construction and the selection of materials comply with the criteria stipulated in EU directives, referred to as ATEX (for use in potentially explosive atmospheres) for variants with brass or stainless steel bearings (-M, -E)

### Material and surfaces

- Casing and blades made of galvanised sheet steel or stainless steel
- Blade shafts, drive arms and external linkages made of galvanised steel or stainless steel
- Plastic, brass or stainless steel bearings
- P1: powder-coated, RAL CLASSIC colour
- PS: powder-coated, DB colour

### Standards and guidelines

- Casing air leakage to EN 1751, class C

### Maintenance


- Maintenance-free, given that construction and the materials used are not subject to wear
- Contamination should be removed as it may lead to corrosion and to increased air leakage in closed multileaf dampers

## Function

Multileaf dampers with external linkage can have parallel action blades or opposed action blades. An external linkage transfers the synchronous rotational movement from the drive arm to the individual blades. Even very large multileaf dampers can be


safely opened and closed with this type of linkage. Opposed action blades close at various speeds as the linkage includes a transverse link. This facilitates the closing process and reduces the air leakage in closed multileaf dampers.

### Schematic illustration of JZ-S

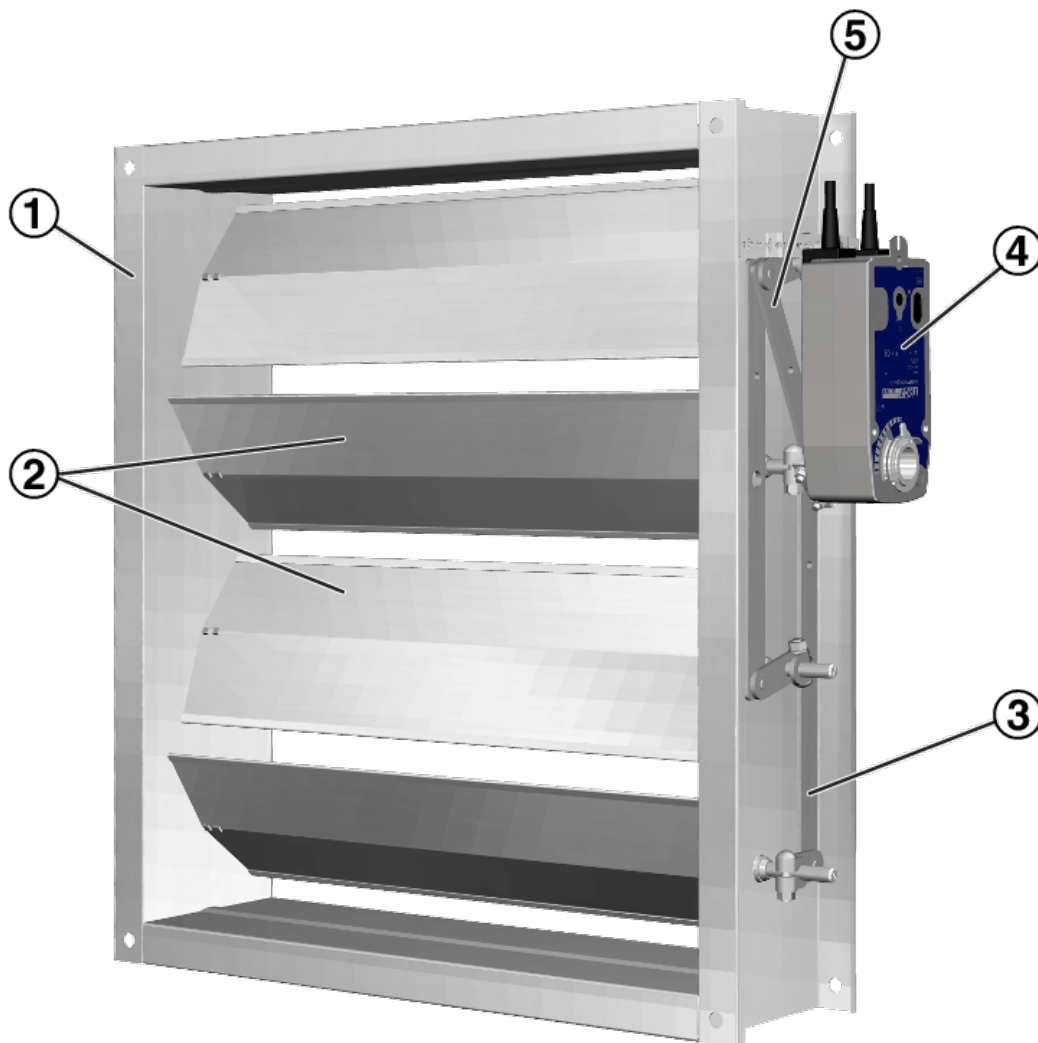

- ① Casing
- ② Opposed blades
- ③ External linkage
- ④ Actuator
- ⑤ Transverse link

## Schematic illustration of JZ-P

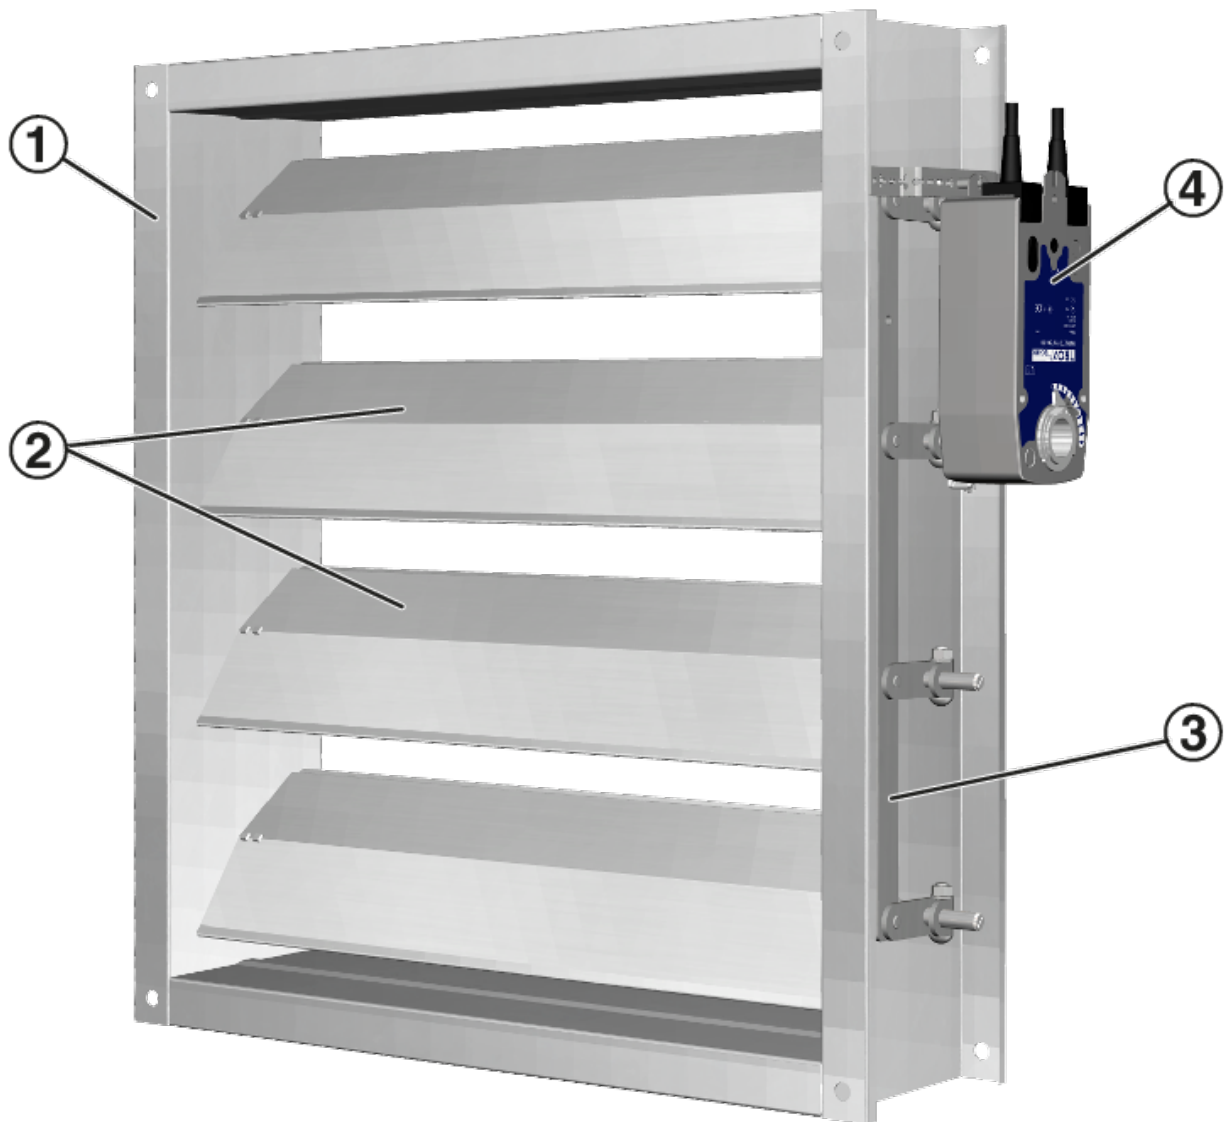

- ① Casing
- ② Parallel blades
- ③ External linkage
- ④ Actuator

### Technical data

The torques for operating multileaf dampers must be dimensioned in such a way that the damper can be safely opened and closed. For closure, the torque must suffice to ensure complete shut-off by the blades. Opening is initiated without the impact of aerodynamic forces. When air flows through the damper, the aerodynamic forces of the airflow create a closing force (torque) on the blades; this happens independently of the direction of the airflow. This closing force must be countered, or overcome. The blade angle  $\alpha$  with the largest torque depends, among other things, on the fan characteristics.

Nominal sizes	200 × 180 – 2000 × 1995 mm
Operating temperature	-20 to 100 °C

#### JZ-\*, JZ-\*-A2, minimum torques [Nm]

H	B									
	200	400	600	800	1000	1200	1400	1600	1800	2000
180 – 1995	10	10	10	10	10	10	10	10	10	10

#### Steel and stainless steel multileaf dampers, free cross-sectional area [m<sup>2</sup>]

H	B									
	200	400	600	800	1000	1200	1400	1600	1800	2000
180	0.03	0.06	0.09	0.12	0.15	0.18	0.21	0.24	0.27	0.3
345	0.06	0.11	0.17	0.23	0.28	0.34	0.4	0.45	0.51	0.57
510	0.08	0.17	0.25	0.33	0.42	0.5	0.58	0.67	0.75	0.83
675	0.11	0.22	0.33	0.44	0.55	0.66	0.77	0.88	0.99	1.1
840	0.14	0.27	0.41	0.55	0.69	0.82	0.96	1.1	1.23	1.37
1005	0.16	0.33	0.49	0.66	0.82	0.98	1.15	1.31	1.47	1.64
1170	0.19	0.38	0.57	0.76	0.95	1.14	1.33	1.52	1.72	1.91
1335	0.22	0.43	0.65	0.87	1.09	1.3	1.52	1.74	1.96	2.17
1500	0.24	0.49	0.73	0.98	1.22	1.47	1.71	1.95	2.2	2.44
1665	0.27	0.54	0.81	1.08	1.36	1.63	1.9	2.17	2.44	2.71
1830	0.3	0.6	0.89	1.19	1.49	1.79	2.08	2.38	2.68	2.98
1995	0.32	0.65	0.97	1.3	1.62	1.95	2.27	2.6	2.92	3.25

Intermediate sizes: Interpolate values between widths.

#### Maximum permitted differential pressure $\Delta p_{\text{max}}$ [Pa] in the case of closed multileaf damper

Construction	B						
	800	1000	1200	1400	1600	1800	2000
Standard construction	2500	2000	1650	1400	1250	1100	1000
Brass bearings (-M)	3000	2500	2200	1950	1750	1600	1500
Stainless steel bearings (-E)	3000	2500	2200	1950	1750	1600	1500
Reinforced blades (-M-V, -E-V)	3500	3000	2700	2500	2300	2100	2000

**JZ-S, JZ-S-A2, sound power level  $L_{WA}$  [dB (A)] in the case of closed multileaf damper**

$\Delta p$ , [Pa]	Area B × H [m <sup>2</sup> ]							
	0.14	0.2	0.4	0.6	0.8	1.2	2	4
100	57	58	61	63	64	66	68	71
200	63	65	68	69	71	72	75	77
500	71	72	76	78	79	81	83	84
1000	78	80	82	84	85	88	90	>90
1500	81	83	86	88	89	>90	>90	>90
2000	84	85	89	>90	>90	>90	>90	>90

**JZ-P, JZ-P-A2, sound power level  $L_{WA}$  [Pa] in the case of closed multileaf damper**

$\Delta p$ , [Pa]	Area B × H [m <sup>2</sup> ]							
	0.14	0.2	0.4	0.6	0.8	1.2	2	4
100	57	58	61	63	64	64	68	71
200	63	65	68	69	71	71	75	78
500	71	72	76	78	79	79	85	87
1000	78	80	82	84	85	85	89	>90
1500	81	82	86	88	89	89	>90	>90
2000	84	86	89	>90	90	>90	>90	>90



## Quick sizing

Quick sizing tables provide a good overview of the expected sound power levels and differential pressures. Approximate intermediate values can be interpolated. Precise intermediate values and spectral data can be calculated with our Easy Product Finder design program. The LWA sound power levels apply to multileaf dampers with a cross-sectional area ( $B \times H$ ) of 1 m<sup>2</sup>. The differential pressures apply to multileaf dampers installed in ducts (installation type A).

### JZ-S, JZ-S-A2, differential pressure and sound power level

v [m/s]	Damper blade position $\alpha$									
	OPEN		20°		40°		60°		80°	
	$\Delta p_t$ [Pa]	$L_{WA}$ [dB(A)]	$\Delta p_t$ [Pa]	$L_{WA}$ [dB(A)]	$\Delta p_t$ [Pa]	$L_{WA}$ [dB(A)]	$\Delta p_t$ [Pa]	$L_{WA}$ [dB(A)]	$\Delta p_t$ [Pa]	$L_{WA}$ [dB(A)]
0.5	<5	<30	<5	<30	<5	<30	22	44	255	67
1	<5	<30	<5	<30	8	38	85	59	1010	82
2	<5	31	<5	35	28	53	335	74	>2000	>90
4	<5	46	10	50	110	68	1395	89	>2000	>90
6	<5	55	22	59	250	77	>2000	>90	>2000	>90
8	8	61	40	65	440	83	>2000	>90	>2000	>90

### JZ-P, JZ-P-A2, differential pressure and sound power level

v [m/s]	Damper blade position $\alpha$									
	OPEN		20°		40°		60°		80°	
	$\Delta p_t$ [Pa]	$L_{WA}$ [dB(A)]	$\Delta p_t$ [Pa]	$L_{WA}$ [dB(A)]	$\Delta p_t$ [Pa]	$L_{WA}$ [dB(A)]	$\Delta p_t$ [Pa]	$L_{WA}$ [dB(A)]	$\Delta p_t$ [Pa]	$L_{WA}$ [dB(A)]
0.5	<5	<30	<5	<30	<5	<30	<5	<30	12	42
1	<5	<30	<5	<30	<5	<30	12	40	45	60
2	<5	<30	<5	30	10	41	45	57	185	77
4	<5	41	6	48	40	58	170	75	750	>90
6	<5	51	14	58	85	69	385	85	1685	>90
8	<5	58	25	65	150	76	685	>90	>2000	>90



## Specification text

This specification text describes the general properties of the product. Texts for variants can be generated with our Easy Product Finder design programme.

A life cycle assessment is available for the product series in form of an Environmental Product Declaration (EPD) that has been checked and published by a programme holder.

Rectangular multileaf dampers for volume flow and pressure control as well as for shutting off ducts and openings in walls and ceiling slabs. Ready-to-operate unit which consists of the casing, aerofoil blades and the blade mechanism. Flanges on both sides, suitable for duct connection. The blade position is indicated externally by a notch in the blade shaft extension. Casing air leakage to EN 1751, class C.

### Special characteristics

- Aerofoil blades
- Low-maintenance, robust construction
- No parts with silicone
- Available in standard sizes and many intermediate sizes

### Material and surfaces

- Casing and blades made of galvanised sheet steel or stainless steel
- Blade shafts, drive arms and external linkages made of galvanised steel or stainless steel
- Plastic, brass or stainless steel bearings
- P1: powder-coated, RAL CLASSIC colour
- PS: powder-coated, DB colour

### Construction

Duct connection

- Corner holes on both sides
- G: Flange holes on both sides

Bearings

- Plastic bearings, operating temperature -20 – 100 °C
- M: Brass bearings, operating temperature -20 – 150 °C
- E: Stainless steel bearings, operating temperature -20 – 150 °C

Blades

Only for steel or stainless steel multileaf dampers with brass or stainless steel bearings (JZ-...-M, JZ-...-E)

- V: Reinforced blades available from width 800 mm

### Technical data

- Nominal sizes: 200 × 180 mm – 2000 × 1995 mm
- Operating temperature: -20 to 100 °C

### Sizing data

- $q_v$  (m<sup>3</sup>/h)
- $\Delta p_t$  [Pa]

Air-regenerated noise

- $L_{PA}$  [dB(A)]

Order code

JZ - P - A2 - G - M - - L / 1000 × 1005 / ER / Z64 / NC / P1 - RAL 9010  
 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12

**1 Type**

JZ Multileaf damper

**2 Function**

S Opposed (standard)  
 P Parallel

**3 Material**

No entry: galvanised steel  
 A2 Stainless steel

**4 Duct connection**

No entry: corner holes on both sides,  
 G Flange holes on both sides (no corner holes)

**5 Bearings**

No entry: plastic bearings  
 M Brass bearings  
 E Stainless steel bearings

**6 Construction of blades**

Only for steel or stainless steel multileaf dampers with brass or stainless steel bearings  
 V Reinforced blades, available from width 800 mm

**7 Operating side**

No entry: right  
 L left

**8 Nominal size [mm]**

Specify size width × height

Galvanised steel variants are available with the width or height

**Order example: JZ-S-G-M-V-L/800×510/ER/Z43**

Function	Opposed
Material	Galvanised steel
Duct connection	Flange holes on both sides
Bearings	Brass bearings
Construction of blades	Reinforced blades
Operating side	Left
Nominal size	800 × 510 mm
Installation subframe	With
Attachments	Actuator, 10 Nm, 230 V AC, 3-point
User interface	Standard construction

subdivided  
 Width > 2000: width subdivided  
 Height > 1995: height subdivided

**9 Installation subframe**

No entry: without installation subframe  
 ER With installation subframe (duct connection G only)

**10 Attachments**

No entry: without attachments  
 Z04 – Z07 Hold open device  
 Z12 – Z51 Actuators  
 ZF01 – ZF15 Spring return actuators  
 Z60 – Z77 Pneumatic actuators

Explosion-proof actuators

Z1EX, Z3EX Electrical  
 Z60EX – Z77EX Pneumatic

**11 Damper blade safety function**

Only with spring return actuators or pneumatic actuators  
 NO pressure off/power off to OPEN (Normally Open)  
 NC pressure off/power off to CLOSE (Normally Closed)

**12 Surface**

No entry: standard construction  
 P1 powder-coated, specify RAL CLASSIC colour

Gloss level  
 RAL 9010 GU 50  
 RAL 9006 GU 30  
 All other RAL colours GU 70

## Variants

### Multileaf damper, variant JZ-S



Multileaf damper with quadrant stay

### Variant

- Multileaf damper with opposed blade action, made of galvanised sheet steel

### Material and surfaces

- Casing and blades made of galvanised sheet steel
- Shafts, drive arms and linkages made of galvanised steel
- Plain bearings made of plastic
- P1: powder-coated, RAL CLASSIC colour
- PS: powder-coated, DB colour

**Multileaf damper, variant JZ-P**

Multileaf damper with installation subframe and actuator

**Variant**

- Multileaf damper with parallel blade action, made of galvanised sheet steel

**Material and surfaces**

- Casing and blades made of galvanised sheet steel
- Shafts, drive arms and linkages made of galvanised steel
- Plain bearings made of plastic
- P1: powder-coated, RAL CLASSIC colour
- PS: powder-coated, DB colour

**Multileaf damper, variant JZ-S-A2**

Multileaf damper with actuator

**Variant**

- Multileaf damper with opposed blade action, made of stainless steel

**Material and surfaces**

- Casing, blades and linkages made of stainless steel, material no. 1.4301
- Shafts made of stainless steel, material no. 1.4305
- Surface: pickled and passivated
- P1: powder-coated, RAL CLASSIC colour
- PS: powder-coated, DB colour

**Multileaf damper, variant JZ-P-A2**

Multileaf damper with actuator

**Variant**

- Multileaf damper with parallel blade action, made of stainless steel

**Material and surfaces**

- Casing, blades and linkages made of stainless steel, material no. 1.4301
- Shafts made of stainless steel, material no. 1.4305
- Surface: pickled and passivated
- P1: powder-coated, RAL CLASSIC colour
- PS: powder-coated, DB colour

## Dimensions

## JZ-S, standard sizes

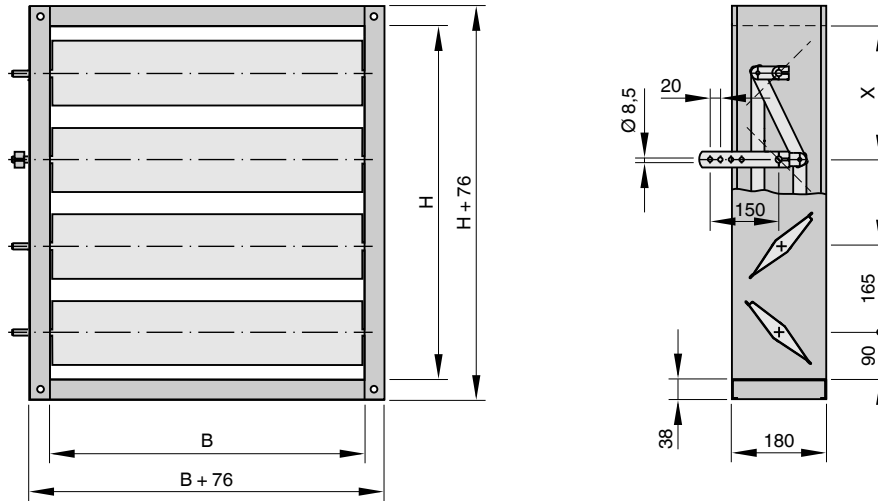


Illustration shows operating side on the left

## JZ-P, standard sizes

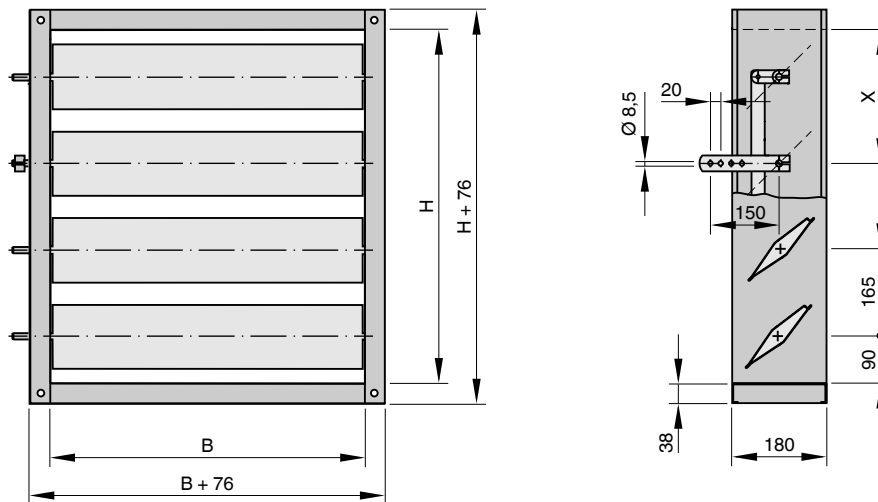


Illustration shows operating side on the left







JZ, JZ-HL, standard sizes

H	No. of blades	Spindle position	
		X	Damper blade
180	1	90	1
345	2	90	1
510	3	90	1
675	4	255	2
840	5	420	3
1005	6	420	3
1170	7	585	4
1335	8	585	4
1500	9	750	5
1665	10	750	5
1830	11	915	6
1995	12	915	6

JZ-P, intermediate sizes

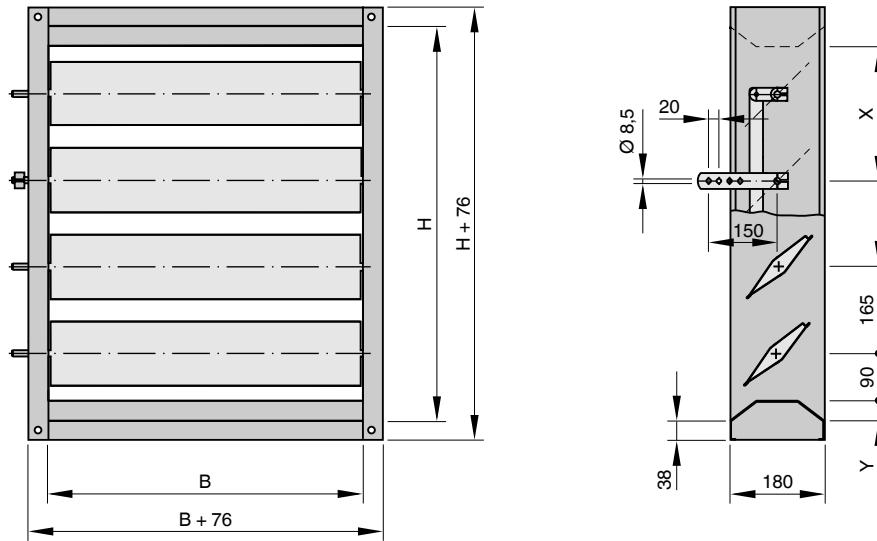


Illustration shows operating side on the left

JZ-S, intermediate sizes

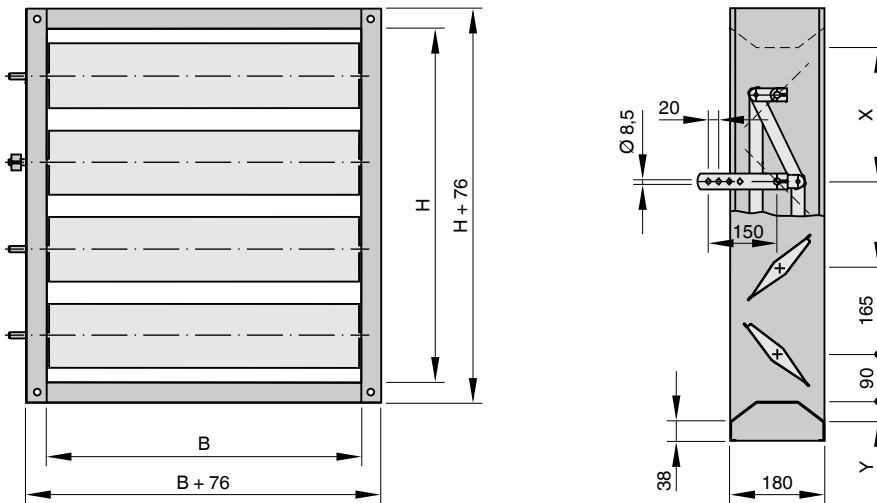


Illustration shows operating side on the left

**JZ, JZ-HL, intermediate sizes**

H	No. of blades	Spindle position		Y
		X	Damper blade	
183 – 343	1	90	1	1.5 – 81.5
348 – 508	2	90	1	1.5 – 81.5
513 – 673	3	90	1	1.5 – 81.5
678 – 838	4	255	2	1.5 – 81.5
843 – 1003	5	420	3	1.5 – 81.5
1008 – 1168	6	420	3	1.5 – 81.5
1173 – 1333	7	585	4	1.5 – 81.5
1338 – 1498	8	585	4	1.5 – 81.5
1503 – 1663	9	750	5	1.5 – 81.5
1668 – 1828	10	750	5	1.5 – 81.5
1833 – 1993	11	915	6	1.5 – 81.5

**JZ, JZ-LL, JZ-HL, weights [kg]**

H	B										
	200	400	600	800	1000	1200	1400	1600	1800	2000	
180	4	6	8	9	11	13	14	16	18	19	
345	6	8	10	12	15	17	19	21	24	26	
510	7	10	13	16	19	22	25	27	30	33	
675	10	13	16	20	23	27	30	33	37	40	
840	11	15	19	23	28	32	37	41	46	50	
1005	11	17	22	27	32	38	43	48	53	59	
1170	13	19	25	31	37	43	49	55	61	67	
1335	15	22	28	35	41	48	55	61	68	74	
1500	16	23	30	37	44	51	59	66	73	80	
1665	17	25	33	41	49	57	65	72	80	88	
1830	18	27	35	44	52	61	69	78	86	95	
1995	19	29	38	47	56	66	75	84	94	103	

## Materials and surfaces

### Material

Order code detail	Part	Material
-	Enclosure	Galvanised sheet steel
-	Blades	Galvanised sheet steel
-	Shafts	Galvanised steel
-	Drive arm	Galvanised steel
-	Linkage	Galvanised steel
-	Bearings	Plastic
A2	Enclosure	Stainless steel, material no. 1.4301
A2	Blades	Stainless steel, material no. 1.4301
A2	Shafts	Stainless steel, material no. 1.4305
A2	Linkage	Stainless steel, material no. 1.4301
E	Bearings	Stainless steel
M	Bearings	Brass

### Surfaces

Order code detail	Part	User interface
-	Enclosure	Untreated
P1-RAL ...	Blades	Powder-coated, colour RAL ... CLASSIC
PS-DB ...	Blades	Powder-coated, colour DB ...

## Attachments

### Quadrant stays and limit switches

Order code detail	Description	Limit switch	Function
Z04	Hold open device	-	
Z05	Hold open device	1	Damper blade position CLOSED
Z06	Hold open device	1	Damper blade position OPEN
Z07	Hold open device	2	Damper blade positions CLOSED and OPEN

### Open/close actuators

Order code detail	Description	Function	Supply voltage	Torque	Auxiliary switch
Z12	SM230A	1-wire-control 2-wire-control (3-point)	100 – 240 V AC	20 Nm	-
Z13	GM230A	1-wire-control -2-wire-control (OPEN-CLOSE)	100 – 240 V AC	40 Nm	-
Z14	SM24A	1-wire-control 2-wire-control (3-point)	24 V AC/DC	20 Nm	-
Z15	GM24A	1-wire-control -2-wire-control (OPEN-CLOSE)	24 V AC/DC	40 Nm	-



Order code detail	Description	Function	Supply voltage	Torque	Auxiliary switch
Z16	SM230A	1-wire-control 2-wire-control (3-point)	100 – 240 V AC	20 Nm	S2A
Z17	GM230A	1-wire-control 2-wire-control (3-point)	100 – 240 V AC	40 Nm	S2A
Z18	SM24A	1-wire-control 2-wire-control (3-point)	24 V AC/DC	20 Nm	S2A
Z19	GM24A	1-wire-control 2-wire-control (3-point)	24 V AC/DC	40 Nm	S2A
Z43	NM230A	1-wire-control 2-wire-control (3-point)	100 – 240 V AC	10 Nm	–
Z45	NM24A	1-wire-control 2-wire-control (3-point)	24 V AC/DC	10 Nm	–
Z47	NM230A	1-wire-control 2-wire-control (3-point)	100 – 240 V AC	10 Nm	S2A
Z49	NM24A	1-wire-control 2-wire-control (3-point)	24 V AC/DC	10 Nm	S2A

Minimum torque of multileaf damper has to be considered when selecting the actuator.

#### Open/close actuators, fast-running

Order code detail	Description	Function	Supply voltage	Torque	Auxiliary switch
ZS21	SMQ24A	1-wire-control	24 V AC/DC	16 Nm	–
ZS22	SMQ24A	1-wire-control	24 V AC/DC	16 Nm	S2A

Only for nominal sizes with a minimum torque not exceeding 16 Nm.

#### Open/close actuators, spring return

Order code detail	Description	Function	Supply voltage	Torque	Auxiliary switch
ZF01	NF24A	Supply voltage on/off	24 V AC/DC	10 Nm	–
ZF02	NFA	Supply voltage on/off	24 – 240 V AC 24 – 125 V DC	10 Nm	–
ZF03	NF24A-S2	Supply voltage on/off	24 V AC/DC	10 Nm	integrated
ZF04	NFA-S2	Supply voltage on/off	24 – 240 V AC 24 – 125 V DC	10 Nm	integrated
ZF06	SF24A	Supply voltage on/off	24 V AC/DC	20 Nm	–
ZF07	SFA	Supply voltage on/off	24 – 240 V AC 24 – 125 V DC	20 Nm	–
ZF08	SF24A-S2	Supply voltage on/off	24 V AC/DC	20 Nm	integrated
ZF09	SFA-S2	Supply voltage on/off	24 – 240 V AC 24 – 125 V DC	20 Nm	integrated
ZF11	EF24A	Supply voltage on/off	24 V AC/DC	30 Nm	–
ZF12	EF230A	Supply voltage on/off	100 – 240 V AC	30 Nm	–
ZF13	EF24A-S2	Supply voltage on/off	24 V AC/DC	30 Nm	integrated
ZF14	EF230A-S2	Supply voltage on/off	100 – 240 V AC	30 Nm	integrated

Minimum torque of multileaf damper has to be considered when selecting the actuator.

**Modulating actuators**

Order code detail	Description	Function	Supply voltage	Torque	Auxiliary switch
Z20	SM24A-SR	2 – 10 V DC	24 V AC/DC	20 Nm	–
Z21	GM24A-SR	2 – 10 V DC	24 V AC/DC	40 Nm	–
Z51	NM24A-SR	2 – 10 V DC	24 V AC/DC	10 Nm	–

Minimum torque of multileaf damper has to be considered when selecting the actuator.

**Modulating actuators, spring return**

Order code detail	Description	Function	Supply voltage	Torque	Auxiliary switch
ZF05	NF24A-SR	2 – 10 V DC	24 V AC/DC	10 Nm	–
ZF10	SF24A-SR	2 – 10 V DC	24 V AC/DC	20 Nm	–
ZF15	EF24A-SR	2 – 10 V DC	24 V AC/DC	30 Nm	–

Minimum torque of multileaf damper has to be considered when selecting the actuator.

## Double acting pneumatic actuators, including explosion-proof actuators

Order code detail		Description	Damper blade safety function	Operating pressure	Torque at 6 bar	Limit switch	Solenoid valve
(1)	(2)						
Z60	Z60 EX	DR030	–	1.2 – 6 bar	35 Nm	–	
Z61	Z61 EX	DR030	power off to close/open	1.2 – 6 bar	35 Nm	–	24 V DC
Z62	Z62 EX	DR030	power off to close/open	1.2 – 6 bar	35 Nm	–	230 V AC
Z63	Z63 EX	DR030	–	1.2 – 6 bar	35 Nm	2	
Z64	Z64 EX	DR030	power off to close/open	1.2 – 6 bar	35 Nm	2	24 V DC
Z65	Z65 EX	DR030	power off to close/open	1.2 – 6 bar	35 Nm	2	230 V AC
Z66	Z66 EX	DR060	–	1.2 – 6 bar	70 Nm	–	
Z67	Z67 EX	DR060	power off to close/open	1.2 – 6 bar	70 Nm	–	24 V DC
Z68	Z68 EX	DR060	power off to close/open	1.2 – 6 bar	70 Nm	–	230 V AC
Z69	Z69 EX	DR060	–	1.2 – 6 bar	70 Nm	2	
Z70	Z70 EX	DR060	power off to close/open	1.2 – 6 bar	70 Nm	2	24 V DC
Z71	Z71 EX	DR060	power off to close/open	1.2 – 6 bar	70 Nm	2	230 V AC

(1) Standard

(2) Explosion-proof (only with brass or stainless steel bearings)

Minimum torque, which depends on the nominal size of multileaf damper, and the operating pressure have to be considered when selecting the actuator.

## Single acting pneumatic actuators, including explosion-proof actuators

Order code detail		Description	Damper blade safety function	Operating pressure	Torque at 6 bar	Limit switch	Solenoid valve
(1)	(2)						
Z72	Z72 EX	SC060 SO060	pressure off to close/open	6 bar	30 Nm	–	–
Z73	Z73 EX	SC060 SO060	power off and pressure off to close/open	6 bar	30 Nm	–	24 V DC
Z74	Z74 EX	SC060 SO060	power off and pressure off to close/open	6 bar	30 Nm	–	230 V AC
Z75	Z75 EX	SC060 SO060	pressure off to close/open	6 bar	30 Nm	2	–
Z76	Z76 EX	SC060 SO060	power off and pressure off to close/open	6 bar	30 Nm	2	24 V DC
Z77	Z77 EX	SC060 SO060	power off and pressure off to close/open	6 bar	30 Nm	2	230 V AC

(1) Standard

(2) Explosion-proof (only with brass or stainless steel bearings)

## Explosion-proof open/close actuators, spring return actuators

Order code detail	Description	Function	Supply voltage	Torque	Auxiliary switch
Z1EX	ExMax15-SF	2-wire-control (3-point)	24 – 240 V AC/DC	15 Nm	integrated



Order code detail	Description	Function	Supply voltage	Torque	Auxiliary switch
Z3EX	ExMax30-SF	2-wire-control (3-point)	24 – 240 V AC/DC	30 Nm	integrated

Only with brass or stainless steel bearings



Z1EX: Only for nominal sizes with a minimum torque up to 15 Nm.



**Product details**

- Constructions with flange holes (-G) do not have corner holes
- Drive shafts (special accessory) upon request

Multileaf dampers made of steel or stainless steel, flange holes

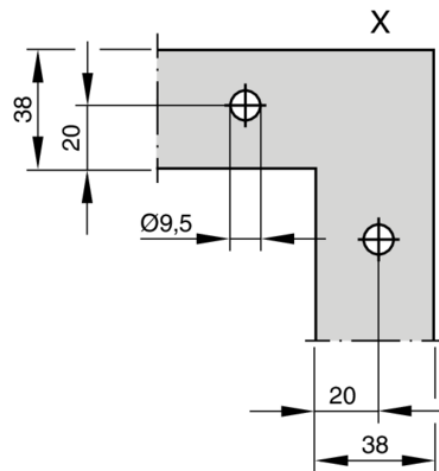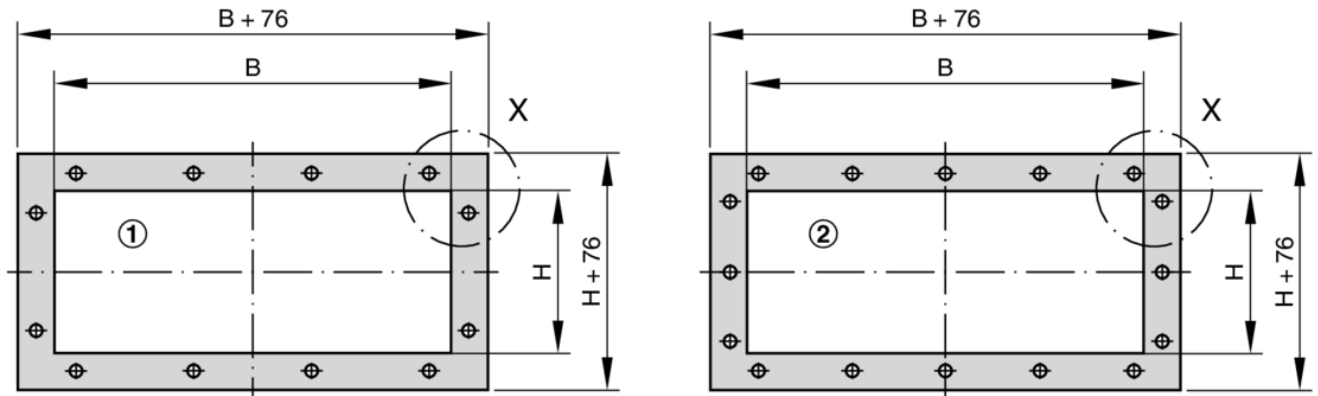

- ① Even number of holes (hole pitch = 250 mm)
- ② Uneven number of holes (hole pitch = 250 mm)






**Steel or stainless steel multileaf dampers, width, no. of flange holes per side**

B	Number of holes n
200 – 287	1
288 – 537	2
538 – 787	3
788 – 1037	4
1038 – 1287	5
1288 – 1537	6
1538 – 1787	7
1788 – 2000	8

Steel or stainless steel multileaf dampers, height, no. of flange holes per side

H	Number of holes n
180 – 211	1
212 – 461	2
462 – 711	3
712 – 961	4
962 – 1211	5
1212 – 1461	6
1462 – 1711	7
1712 – 1961	8
1962 – 1995	9

JZ, drive spindles

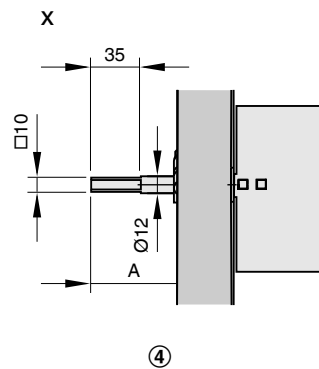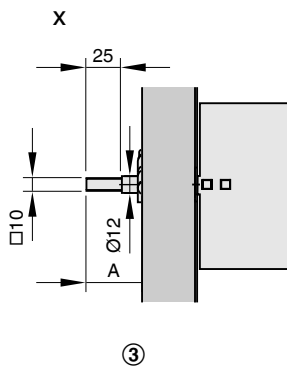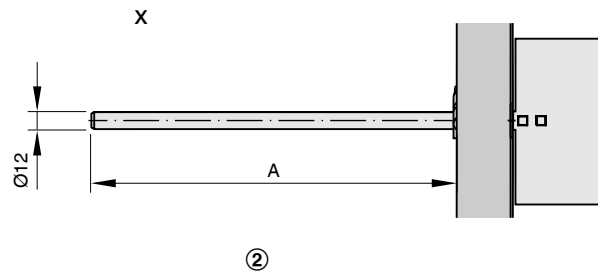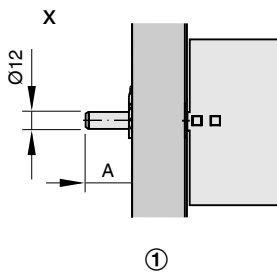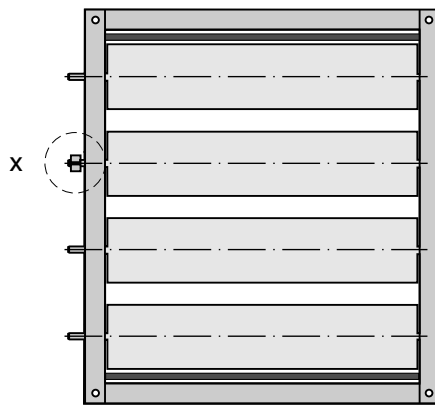

- ① Standard shaft
- ② ZS99 – extended spindle
- ③ ZS991 – square shaft 10 mm
- ④ ZS992 – square shaft 10 mm



**Shaft end projection A [mm]**


Drive shaft	Multileaf damper			
	JZ-S	JZ-P	JZ-S-A2	JZ-P-A2
Standard shaft	32.5	32.5	32.5	32.5
ZS99 – extended spindle	255	255	190	190
ZS991 – square shaft 10 mm	38	38	45	45
ZS992 – square shaft 10 mm	60	60	–	–

## Installation details


### Installation and commissioning

- Only with horizontal blades
- With or without installation subframe
- Torsion-free installation
- For widths exceeding 2000 mm or heights exceeding 1995 mm, install two multileaf dampers side by side or one above the other
- Only for installation in internal spaces


### Wall installation without installation subframe

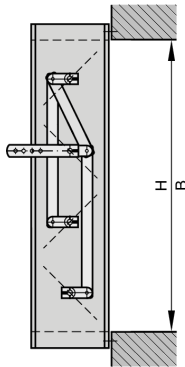

### Duct installation

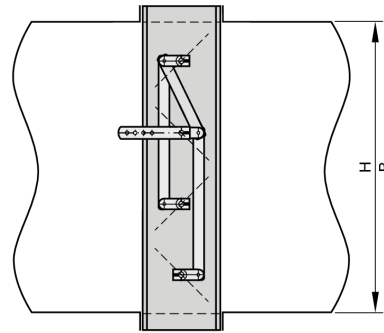

### Width subdivided

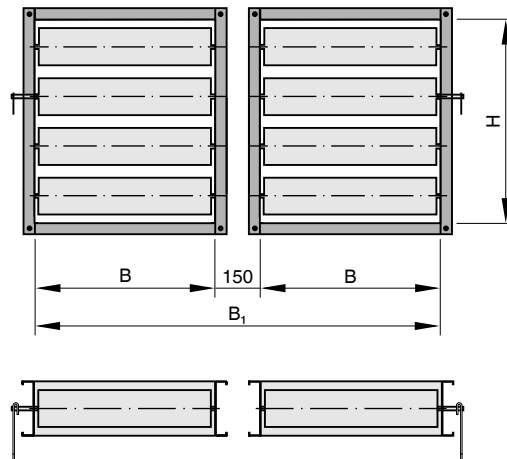


$$B_1 = 2 B + 150$$

### Width subdivided, width

B <sub>1</sub>	B
2550	1200
2950	1400
3350	1600
3750	1800
4150	2000

Height subdivided

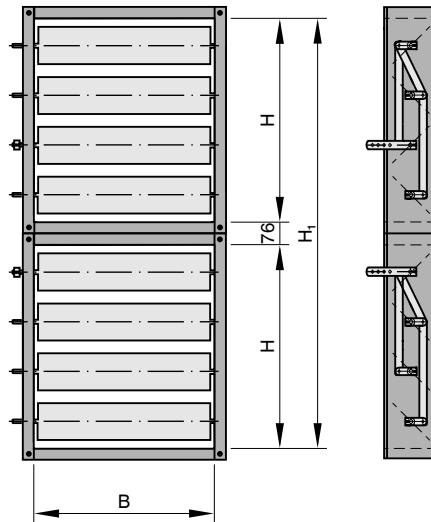

$$H_1 = 2 H + 76$$

Height subdivided, height

$H_1$	H
2086	1005
2416	1170
2746	1335
3076	1500
3406	1665
3736	1830
4066	1995

## Explanation

**B** [mm]; [in]  
Duct width

**H** [mm]; [in]  
Duct height

### Lengths

All lengths are given in millimetres [mm] unless stated otherwise

**n** [ ]  
Number of flange screw holes

**m** [kg]  
Weight

**L<sub>WA</sub>** [dB(A)]  
A-weighted sound power level of air-regenerated noise for the multileaf damper

**α** [kPa]  
Damper blade position, 0°: OPEN, 90°: CLOSED

**A** [m<sup>2</sup>]  
Upstream cross section

**v** [m/s]  
Airflow velocity based on the upstream cross section (B × H)

**q<sub>v</sub>** [m<sup>3</sup>/h]; [l/s]  
Volume flow rate

**Δp<sub>t</sub>** [Pa]  
Differential pressure

**Δp<sub>max t</sub>** [Pa]  
Maximum differential pressure